

1704L 100

Recherche



PCT

WORLD INTELLECTUAL PROPERTY ORGANIZATION
International Bureau

INTERNATIONAL APPLICATION PUBLISHED UNDER THE PATENT COOPERATION TREATY (PCT)

(51) International Patent Classification 6 : H04L 1/08, H04B 7/212	Reg. A1	(11) International Publication Number: WO 97/18650 (43) International Publication Date: 22 May 1997 (22.05.97)
(21) International Application Number: PCT/US96/17186 (22) International Filing Date: 25 October 1996 (25.10.96) (30) Priority Data: 08/559,692 15 November 1995 (15.11.95) US (71) Applicant: ERICSSON INC. [US/US]; 7001 Development Drive, P.O. Box 13696, Research Triangle Park, NC 27709 (US). (72) Inventors: CHENNAKESHU, Sandeep; 311 Glen Abbey Drive, Cary, NC 27513 (US). RYDBECK, Nils; 207 Queensferry Road, Cary, NC 27511 (US). HASSAN, Amer, A.; 412 Key West Mews, Cary, NC 27513 (US). DENT, Paul, W.; Stehags Prastgard, S-240 36 Stehag (SE). (74) Agents: GRUDZIECKI, Ronald, L. et al.; Burns, Doane, Swecker & Mathis, L.L.P., P.O. Box 1404, Alexandria, VA 22313-1404 (US).	(81) Designated States: AL, AM, AT, AU, AZ, BA, BB, BG, BR, BY, CA, CH, CN, CU, CZ, DE, DK, EE, ES, FI, GB, GE, HU, IL, IS, JP, KE, KG, KP, KR, KZ, LC, LK, LR, LS, LT, LU, LV, MD, MG, MK, MN, MW, MX, NO, NZ, PL, PT, RO, RU, SD, SE, SG, SI, SK, TJ, TM, TR, TT, UA, UG, UZ, VN, ARIPO patent (KE, LS, MW, SD, SZ, UG), Eurasian patent (AM, AZ, BY, KG, KZ, MD, RU, TJ, TM), European patent (AT, BE, CH, DE, DK, ES, FI, FR, GB, GR, IE, IT, LU, MC, NL, PT, SE), OAPI patent (BF, BJ, CF, CG, CI, CM, GA, GN, ML, MR, NE, SN, TD, TG). Published With international search report.	

(54) Title: HIGH-PENETRATION TRANSMISSION METHOD FOR A RADIOCOMMUNICATION SYSTEM

(57) Abstract

A method and system for increasing the signal margin of a radiocommunication link to provide a short message service which is reliable, even under non-ideal conditions. According to the method, an increase in transmission power is used in combination with bit repetition to increase signal margin without complications in the mobile unit design, significant delay, or co-channel interference. Where a more significant increase in signal margin is desired, when a longer message is required, or for voice messages, the message may be stored and the mobile unit alerted of the message.

FOR THE PURPOSES OF INFORMATION ONLY

Codes used to identify States party to the PCT on the front pages of pamphlets publishing international applications under the PCT.

AM	Armenia	GB	United Kingdom	MW	Malawi
AT	Austria	GE	Georgia	MX	Mexico
AU	Australia	GN	Guinea	NE	Niger
BB	Barbados	GR	Greece	NL	Netherlands
BE	Belgium	HU	Hungary	NO	Norway
BF	Burkina Faso	IE	Ireland	NZ	New Zealand
BG	Bulgaria	IT	Italy	PL	Poland
BJ	Benin	JP	Japan	PT	Portugal
BR	Brazil	KE	Kenya	RO	Romania
BY	Belarus	KG	Kyrgyzstan	RU	Russian Federation
CA	Canada	KP	Democratic People's Republic of Korea	SD	Sudan
CF	Central African Republic	KR	Republic of Korea	SE	Sweden
CG	Congo	KZ	Kazakhstan	SG	Singapore
CH	Switzerland	LI	Liechtenstein	SI	Slovenia
CI	Côte d'Ivoire	LK	Sri Lanka	SK	Slovakia
CM	Cameroon	LR	Liberia	SN	Senegal
CN	China	LT	Lithuania	SZ	Swaziland
CS	Czechoslovakia	LU	Luxembourg	TD	Chad
CZ	Czech Republic	LV	Latvia	TG	Togo
DE	Germany	MC	Monaco	TJ	Tajikistan
DK	Denmark	MD	Republic of Moldova	TT	Trinidad and Tobago
EE	Estonia	MG	Madagascar	UA	Ukraine
ES	Spain	ML	Mali	UG	Uganda
FI	Finland	MN	Mongolia	US	United States of America
FR	France	MR	Mauritania	UZ	Uzbekistan
GA	Gabon			VN	Viet Nam

-1-

HIGH-PENETRATION TRANSMISSION METHOD FOR A RADIOCOMMUNICATION SYSTEM

Background of the Invention

5 The present invention generally relates to radiocommunication systems and more particularly relates to a system and method for reliably transmitting radiocommunication signals under non-ideal conditions.

Referring to Figure 1, a typical cellular mobile radiocommunication system is shown. The typical system includes a number of base stations similar to base station
10 110 and a number of mobile units or stations similar to mobile 120. Voice and/or data communication can be performed using these devices or their equivalents. The base station includes a control and processing unit 130 which is connected to the MSC (mobile switching center) 140 which in turn is connected to the public switched telephone network (not shown).

15 The base station 110 serves a cell and includes a plurality of voice channels handled by voice channel transceiver 150 which is controlled by the control and processing unit 130. Also, each base station includes a control channel transceiver 160 which may be capable of handling more than one control channel. The control channel transceiver 160 is controlled by the control and processing unit 130. The
20 control channel transceiver 160 broadcasts control information over the control channel of the base station or cell to mobiles locked to that control channel. The voice channel transceiver broadcasts the traffic or voice channels which can include digital control channel location information.

When the mobile 120 first enters an idle mode, it periodically scans the control
25 channels of base stations like base station 110 for the presence of a paging burst addressed to the mobile 120. The paging burst informs mobile 120 which cell to lock on or camp to. The mobile 120 receives the absolute and relative information broadcast on a control channel at its voice and control channel transceiver 170. Then, the processing unit 180 evaluates the received control channel information which
30 includes the characteristics of the candidate cells and determines which cell the mobile

-2-

should lock to. The received control channel information not only includes absolute information concerning the cell with which it is associated, but also contains relative information concerning other cells proximate to the cell with which the control channel is associated. These adjacent cells are periodically scanned while monitoring the primary control channel to determine if there is a more suitable candidate. Additional information relating to specifics of mobile and base station implementations can be found in U.S. Patent Application Serial No. 07/967,027 entitled "Multi-Mode Signal Processing" filed on October 27, 1992 to P. Dent and B. Ekelund, the entirety of which is incorporated herein by reference. It will be appreciated that the base station may be replaced by one or more satellites in a satellite-based mobile radiocommunication system.

To increase radiocommunication system capacity, digital communication and multiple access techniques such as Frequency Division Multiple Access (FDMA), Time Division Multiple Access (TDMA), and Code Division Multiple Access (CDMA) may be used. The objective of each of these multiple access techniques is to combine signals from different sources onto a common transmission medium in such a way that, at their destinations, the different channels can be separated without mutual interference. In a FDMA system, users share the radio spectrum in the frequency domain. Each user is allocated a part of the frequency band which is used throughout a conversation. In a TDMA system, users share the radio spectrum in the time domain. Each radio channel or carrier frequency is divided into a series of time slots, and individual users are allocated a time slot during which the user has access to the entire frequency band allocated for the system (wideband TDMA) or only a part of the band (narrowband TDMA). Each time slot contains a "burst" of information from a data source, e.g., a digitally encoded portion of a voice conversation. The time slots are grouped into successive TDMA frames having a predetermined duration. The number of time slots in each TDMA frame is related to the number of different users that can simultaneously share the radio channel. If each slot in a TDMA frame is assigned to a different user, the duration of a TDMA frame is the minimum amount of time between successive time slots assigned to the same user. CDMA combines FDMA and TDMA. In a CDMA system, each user is assigned a unique:

-3-

pseudorandom user code to uniquely access the frequency time domain. Examples of CDMA techniques include spread spectrum and frequency hopping.

In a TDMA system, the successive time slots assigned to the same user, which are usually not consecutive time slots on the radio carrier, constitute the user's digital traffic channel, which is considered to be a logical channel assigned to the user. The organization of TDMA channels, using the GSM standard as an example, is shown in FIG. 2. The TDMA channels include traffic channels TCH and signalling channels SC. The TCH channels include full-rate and half-rate channels for transmitting voice and/or data signals. The signalling channels SC transfer signalling information between the mobile unit and the satellite (or base station). The signalling channels SC include three types of control channels: broadcast control channel (BCCHs), common control channels (CCCHs) shared between multiple subscribers, and dedicated control channels (DCCHs) assigned to a single subscriber. A BCCH typically includes a frequency correction channel (FCH) and a synchronization channel (SCH), both of which are downlink channels. The common control channels (CCCHs) include downlink paging (PCH) and access grant (AGCH) channels, as well as the uplink random access channel (RACH). The dedicated control channels DCCH include a fast associated control channel (FACCH), a slow associated control channel (SACCH), and a standalone dedicated control channel (SDCCH). The slow associated control channel is assigned to a traffic (voice or data) channel or to a standalone dedicated control channel (SDCCH). The SACCH channel provides power and frame adjustment and control information to the mobile unit.

The random access channel RACH is used by the mobiles to request access to the system. The RACH logical channel is a unidirectional uplink channel (from the mobile to the base station or satellite), and is shared by separate mobile units (one RACH per cell is sufficient in typical systems, even during periods of heavy use). Mobile units continuously monitor the status of the RACH channel to determine if the channel is busy or idle. If the RACH channel is idle, a mobile unit desiring access sends its mobile identification number, along with the desired telephone number, on the RACH to the base station or satellite. The MSC receives this information from the base station or satellite and assigns an idle voice channel to the mobile station, and

-4-

transmits the channel identification to the mobile through the base station or satellite so that the mobile station can tune itself to the new channel. All time slots on the RACH uplink channel are used for mobile access requests, either on a contention basis or on a reserved basis. Reserved-basis access is described in U.S. Patent Application No. 5 08/140,467, entitled "Method of Effecting Random Access in a Mobile Radio System", which was filed on October 25, 1993, and which is incorporated in this application by reference. One important feature of RACH operation is that reception of some downlink information is required, whereby mobile stations receive real-time feedback for every burst they send on the uplink. This is known as Layer 2 ARQ, or automatic repeat request, on the RACH. The downlink information preferably comprises twenty- 10 two bits that may be thought of as another downlink sub-channel dedicated to carrying, in the downlink, Layer 2 information specific to the uplink. This flow of information, which can be called shared channel feedback, enhances the throughput capacity of the RACH so that a mobile station can quickly determine whether any burst of any access 15 attempt has been successfully received. As shown in FIG. 2, this downlink information is transmitted on channel AGCH.

Transmission of signals in a TDMA system occurs in a buffer-and-burst, or discontinuous-transmission, mode: each mobile unit transmits or receives only during its assigned time slots in the TDMA frames on the mobile unit's assigned frequency. 20 At full rate, for example, a mobile station might transmit during slot 1, receive during slot 2, idle during slot 3, transmit during slot 4, receive during slot 5, and idle during slot 6, and then repeat the cycle during succeeding TDMA frames. The mobile unit, which may be battery-powered, can be switched off (or "sleep") to save power during the time slots when it is neither transmitting nor receiving.

25 To increase mobility and portability, radiocommunication subscribers tend to prefer mobile units having a relatively small, omnidirectional (and accordingly, less powerful) antenna over mobile units having a large or directional antenna. Because of this preference, it is sometimes difficult to provide sufficient signal strength for the exchange of communication signals between typical mobile units having a small, 30 omnidirectional antenna and a mobile switching center (MSC) or satellite. This problem is particularly serious in satellite-based mobile radiocommunications.

-5-

A satellite-based mobile radiocommunication system provides radiocommunication services to particular geographical areas of the earth using one or more partially overlapping satellite beams. Each satellite beam has a radius of up to about 1000 KM. Due to the power limitations of a satellite, it is not practical to
5 provide a high link margin in every beam simultaneously.

Because mobile satellite links are severely power limited, communication is typically limited to line-of-sight channels with Ricean fading. Ricean fading occurs from a combination of a strong line-of-sight path and a ground-reflected wave, along with weak building-reflected waves. These channels require a communications link
10 margin of approximately 8 dB or less to achieve voice communication in ideal or near-ideal conditions, such as when the mobile radiotelephone unit antenna is properly deployed and the unit is in an unobstructed location. In these near-ideal channels, the mobile unit can successfully monitor the paging channel to detect incoming calls. In non-ideal conditions, such as when the mobile unit antenna is not deployed or the
15 mobile unit is in an obstructed location (e.g., inside a building) reflected waves, including ground-reflected and building-reflected waves, become dominant. The channels in these non-ideal conditions are characterized by flat Rayleigh fading (the most severe type of fading) with severe attenuation. In such channels, a link margin of as much as 30 dB or more is required to achieve voice communication, and the
20 mobile unit may have difficulty monitoring the paging channel to detect incoming calls. In these non-ideal conditions where voice communication is made difficult, a short message service (SMS) is desirable. Due to the power limitations of the satellite, SMS is particularly effective when used in non-ideal conditions to alert a mobile station user of an incoming call. The mobile station user may then change locations
25 to receive or return the call. The term "link margin" or "signal margin" refers to the additional power required to offer adequate service over and above the power required under ideal conditions- that is, a channel having no impairments other than additive white Gaussian noise (AWGN). "Impairments" include fading of signal amplitude, doppler shifts, phase variations, signal shadowing or blockage, implementation losses.
30 and anomalies in the antenna radiation pattern.

-6-

Whether transmitting voice or data, it is frequently desirable to increase the signal margin to ensure reliable radiocommunication performance, particularly in power-limited satellite applications. Known methods of increasing the link margin of a signal include expanding the channel bandwidth, increasing signal power, and bit repetition. Each of these methods has significant limitations. Bandwidth expansion is typically achieved by known methods such as signal spreading and low bit rate error correction coding, and results in a signal which is less sensitive to fading. Bandwidth expansion reduces spectrum allocation efficiency. Further, in a SMS application, if the expanded bandwidth of the voice channel is different from the bandwidth of the message channel, two separate and complete radios (one for each service) will be required in the mobile unit, thereby complicating its design. Also, a coherent Rake receiver or equalizer is also typically required to reduce delay spread, further complicating the design of the mobile unit. Bandwidth expansion may also be implemented by repeated transmissions of the entire voice or data message. However, under the non-ideal conditions of interest, this method is not effective because each repetition is typically below the noise floor (that is, does not have a sufficient margin), resulting in a high error rate and preventing the coherent integration of the repetitions.

Increasing signal power may also be used to provide a higher margin. Due to the power limitations of the satellite, this is typically not a practical approach. In addition to increasing the cost of the system, increased transmission power also makes it more difficult to control co-channel interference, particularly in TDMA systems with narrow re-use margins. Accordingly, large power increases from the satellite to the mobile unit may be provided only during periods of relatively light use. Further, because the mobile unit is even more power limited than the satellite, this technique is typically practical only in one direction, from the satellite to the mobile unit.

Bit repetition may also be used to increase the margin. Bit repetition may be accomplished with a lower error rate than message repetition, particularly in non-ideal conditions. Bit repetition causes transmission delay, which is not desirable for voice signals, for obvious reasons. However, transmission delay may be acceptable for data communications, such as a SMS feature, provided that the delay is kept to a reasonable minimum. Bit repetition is achieved by transmitting individual bits or modulation

-7-

symbols, or packets of bits or modulation symbols, a plurality of times such that all repetitions are contained within the same time slot or slots of successive TDMA frames. The receiver integrates the energy from each repetition to create a signal having a higher margin. As noted above, bit repetition can cause significant delay, depending upon the length of the message. To achieve a 30 dB signal margin, each bit will have to be repeated 1000 times. A typical short message has between 32 and 64 characters in the GSM system, the European digital standard, up to 245 characters in the DAMPS (Digital Advanced Mobile Phone Service) system currently used in the United States, and up to 160 characters in the DECT (Digital European Cordless Telephone) system. Assuming a GSM system having TDMA frames of 18.64 ms, with 16 slots per frame and 114 data bits/slot, the minimum delay for receiving a 64 character message, not including propagation time, is as follows:

$$64 \text{ bits} \times 8 \text{ bits/character} \times 1000 \text{ repetitions/bit} \times 18.64 \text{ ms/slot} \times 1/114 \text{ slot/data bit} = 84 \text{ seconds.}$$

Such a delay is highly undesirable, even for data transmission. Accordingly, it would be desirable for a radiocommunication system to allow for transmission of signals at an increased signal margin without significant delay and without a significant increase in power.

It would be further desirable for a communication system to allow for transmission of signals with an increased signal margin without requiring expansion of the channel bandwidth.

It would also be desirable for a TDMA communication system to allow for transmission of signals with an increased signal margin without requiring a change in the structure or organization of TDMA frames.

It would be further desirable for a mobile radiocommunication system to allow for transmission of data messages originating from either a mobile unit or from a satellite or base station with an increased signal margin.

It would be further desirable for a communication system to selectively increase the signal margin of a communication link for the transmission of data messages.

Summary of the Invention

The above-noted and other limitations of conventional communication systems and methods are overcome by the present invention, which provides for a high-penetration transmission method in which signal margin is increased by a combination of bit repetition and a relatively small increase in power. According to exemplary
5 embodiments, the combination of bit repetition and a relatively small increase in power avoids the unacceptable delays characteristic of systems which rely solely on repetition to increase the signal margin. Likewise, the combination of repetition and a relatively small increase in power avoids the co-channel interference problems of systems which
10 rely solely on a power increase to increase the signal margin.

According to an exemplary embodiment of the present invention, a mobile radiocommunication system is provided with a short message service feature for transmitting alphanumeric messages to and from a mobile unit. In order to ensure reliable transmission over channels having severe attenuation, the communication
15 system, a short message is encoded with error detection coding; the message is divided into packets or groups of one or more bits each; each packet is transmitted, at a power level greater than the power level for voice transmission, multiple times over a TDMA communication channel, using the same time slot or slots for each transmission; and the transmissions are integrated and checked for errors at the receiver to form a signal
20 having an increased margin.

Brief Description of the Drawings

The foregoing objects, features and advantages of the present invention will be more readily understood upon reading the following detailed description in conjunction
25 with the drawings in which:

FIG. 1 is a block diagram of an exemplary mobile radiocommunication system;

FIG. 2 is a diagram showing the organization of channels in a typical GSM digital radiocommunication system;

FIG. 3 is a diagram of a satellite-based mobile radiocommunication system in
30 which the signal transmission method of the present invention may be implemented;
and

FIG. 4 is a flow chart describing the transmission of a short message according to the present invention.

Detailed Description of the Preferred Embodiments

5 While the following description is directed toward a short message service implemented in a satellite-based radiocommunication system, it will be appreciated that the present invention may also be applied to other types of communication systems.

In a satellite-based mobile radiocommunication system, a communication link for transmitting voice or data may be established between a mobile station and either a
10 standard telephone or a second mobile station through one satellite, multiple satellites, or a combination of one or more satellites and the PSTN (public switched telephone network). Such a system, as shown in FIG. 3, may be desirable to achieve a broad geographical coverage in which few or no base stations are present, and additional base stations are not practical, such as in rural areas. Due to the inherent power limitations
15 of satellites, voice communications links between the satellite and the mobile station require ideal or near-ideal conditions; that is, conditions such as line-of-sight communication with the mobile station's antenna properly deployed. In non-ideal conditions, such as when the mobile station is shadowed (e.g., inside a building, etc.) or when the mobile antenna is not properly deployed, the power or signal margin
20 requirements for communication increases significantly due to the increased attenuation in the channel. In such situations (shown as MUz in FIG. 3), Rayleigh fading often prevents satisfactory communication, and it is therefore desirable to send a short alphanumeric message to the mobile station. The message may be used, for example, to inform the subscriber of an incoming call. The present invention ensures reliable
25 transmission of the message by providing for an efficient technique for increasing signal margin without significant delay, power increase, or co-channel interference.

For purposes of illustration only, and without limiting the scope of the invention, a satellite-based GSM radiocommunication system using TDMA channels may be assumed to exhibit the following conditions. The communication channel has
30 no line of sight component and is subject to flat Rayleigh fading with severe attenuation. As will be appreciated by those of skill in the art, Rayleigh (or multipath)

-10-

fading is a phenomenon which occurs when multipath waves form standing-wave pairs due to reflection from the physical structures in a service area. The standing-wave pairs summed together form an irregular wave fading structure. When the mobile unit is stationary, it receives a constant signal. However, when the mobile unit is moving,
5 the fading structure causes fading to occur which increases as the mobile unit moves faster. The mean signal level of the non-ideal Rayleigh channel is approximately 20-30 dB below the signal level of a near-ideal line-of-sight channel.

In order to ensure reliable transmission of a short message to the mobile unit in non-ideal conditions, the signal margin must be increased. According to the present
10 invention, bit repetition and power increase may be combined to provide an increased signal margin without significant delay.

It will be appreciated that decibels (dB) are units used to express ratios of power, current, or voltage. Specifically, a power ratio ($P2/P1$) may be expressed in decibels by the formula $\text{dB} = 10 \log (P2/P1)$. A signal margin of 30 dB requires a
15 power ratio of 1000, since $10 \log 1000 = 30$. Thus, to achieve this signal margin solely by bit repetition, each bit must be repeated 1000 times and the signal margin from each repetition must be integrated at the receiver, resulting in the 32 second delay calculated above. However, to achieve a 15 dB margin, the required power ratio is only 31.623, since $10 \log 31.623 = 15$. Thus, a 30 dB signal margin may be provided
20 by increasing the power by 15 dB and repeating each bit approximately 31 times. Using this technique, the bit-repetition delay for a 64 character message is $(64 \text{ characters} \times 8 \text{ bits/character} \times 31 \text{ repeats/bit} \times 18.64 \text{ ms/slot} \times 1/114 \text{ slot/bits})$ approximately 2.5 seconds. As a result, the bit repetition delay is maintained at a reasonable level, and the power increase is also maintained at a reasonable level,
25 thereby avoiding co-channel interference. It will be appreciated that many different combinations of repetitions and power increases are possible to achieve successful communication in Rayleigh fading environments without significant delay. Further, rather than repeating individual bits of a digital signal, groups of bits may be repeated.

To implement the technique of the present invention, the power increase from
30 the satellite to the mobile station may be provided by averaging a power load across multiple users. That is, communication channels used by mobile units in near-ideal

-11-

conditions might have their power reduced to increase the power supply to a mobile unit or units in the non-ideal conditions. Power increase may also be provided by time averaging, in which individual slots in consecutive TDMA frames are transmitted at an increased power level. It will be appreciated that the power increase from the satellite to the mobile station may also be achieved by other techniques known in the art.

The power limitations of the mobile unit are even more severe than the power limitations of the satellite. Thus, it is even more difficult to increase power for communication from the mobile to the satellite. Such communication is necessary to send a message or acknowledge receipt of a message. According to one embodiment of the present invention, the power increase from the mobile unit to the satellite may be achieved by allowing the mobile unit to transmit on all time slots of the random access channel RACH. Bit repetition may also be implemented by the mobile unit to further effectively increase the margin of the signal transmitted to the satellite. Since acknowledgement by the mobile unit over the RACH channel may be accomplished by a signal having a low information rate, a higher number of sync bits and a higher number of bit and message repetitions relative to the forward channel can be used to compensate for the lower transmission power of the mobile unit. Preferably, the mobile unit transmits consecutive repetitions on separate carrier frequencies to decorrelate the repetitions. Because the message is short, the transmission time will be short and the average transmitted power will be acceptable using this system.

Referring now to FIG. 4, a flow chart describing the transmission of a short message using the transmission method of the present invention is shown. In step 100, a sending party inputs a message to be transmitted to a receiving subscriber. The message may be input into the communication system directly by the sending party through a mobile unit, a standard telephone, a computer terminal, or equivalent device, or the message may be input indirectly by calling an operator at a service center who inputs the message into the system. In step 102, the information bits comprising the short message are encoded by an encoder located at the transmitter with an error detection code, such as CRC. The encoded message constitutes a codeword of some number X of codeword bits or symbols. It should be recognized that the transmitter may be the satellite, a base station, or a mobile unit. In step 104, each of the X

-12-

codeword bits or symbols output by the encoding means are repeated N times to form a packet containing N bits. It will be apparent that, instead of repeating individual bits or symbols, groups of two or more bits or symbols could also be repeated. Packets are then transmitted such that each slot within a TDMA frame includes one or more

5 packets of repeated bits, error detection coding bits, and a sync burst to enable the receiver to estimate the channel quality. All bits comprising the encoded short message are transmitted in this fashion. Once the entire encoded message has been transmitted, the transmission of the message (in the form of packets of N codeword bits) is repeated M times to achieve the desired signal margin. It will be appreciated

10 that, since the short message may be transmitted from a satellite, base station, or mobile station, encoding and transmitting functions are provided in each of these devices. It will also be appreciated that, in order to implement the technique of the present invention, means are included in the transmitter to determine the number of bit repetitions N, message repetitions M, and power increase necessary to achieve the

15 signal margin required for successful transmission of the message.

In step 108, the receiving device (i.e., the mobile unit, satellite, base station, or equivalent device) samples the received signal, including the repeated encoded message bits, error detection bits, and channel quality estimation bits, and generates a metric sum of the form $\gamma_j = \sum_{i=1}^N |r_{ij} - \hat{C}_j S|^2$, where r_{ij} is the sampled received signal

20 corresponding to the i th repetition of the information bit or symbol S in packet repeat j , and C_j is the corresponding estimate of channel quality. In step 110, a decoder contained in the receiving device decodes each encoded bit or symbol in the TDMA slot from the metric sums, using soft combining or majority logic voting, or other suitable decoding methods. To implement soft combining, the decoder adds metric

25 sums as $\gamma = \sum_{j=1}^M \gamma_j$ and makes a bit or symbol decision based on the sum. To implement majority logic voting, the decoder makes a preliminary bit or symbol decision for each metric γ_j and then makes a final bit or symbol decision by comparing all of the preliminary decisions. Thus, if the decoder has made M preliminary decisions, the decoder will determine that the corresponding information

30 bit is a 1 if more than half of the preliminary decisions were 1; otherwise, the decoder will determine that the corresponding information bit is a 0. The same logic is used to

-13-

decode a bit that is a 0. To prevent an error which might result if exactly half of the preliminary decisions are 0 and exactly half of the preliminary decisions are 1, M is chosen to be an odd number. The decoded bits are combined coherently and the multiple transmissions of the message are combined coherently to generate a message
5 signal having an increased margin.

In step 112, an error detector contained in the receiving apparatus detects errors based on the CRC error detection coding provided at the transmitting apparatus. If no errors are detected, the message is displayed on the receiving subscriber's mobile unit in step 114. If an error is detected, then the message is not displayed at the receiving
10 apparatus, the user is notified of an erroneous message by a displayed error message or by an audio signal, and the receiver requests the transmitter to retransmit message or the erroneous parts of the message in accordance with a bidirectional radio protocol described in more detail below.

According to the present invention, repeated transmission of messages may be
15 used in combination with repetition of individual portions of a message. That is, individual portions of the message may be transmitted multiple times, and when the entire message has been transmitted by means of the repeated transmissions of the message portions, the entire message may be transmitted again.

According to a further aspect of the present invention, the message repetitions
20 are decorrelated by, for example, transmitting the message or message portions on different frequencies, on different polarizations, or at appropriate time delays.

The transmission system of the present invention may further include forward error correction (FEC) means. In such an arrangement, the transmitter is provided with a second encoder for encoding the information bits of the short message with an
25 error correction code, after encoding the information bits with an error detection code in step 102. The message is transmitted, and the received message decoded, in the manner indicated above. With majority logic voting, a hard decision decoder is employed, and the bits at the output of the majority logic voter are fed to a channel decoder with no additional information (such as bit reliability information estimated
30 from the channel). If soft combining is used, a soft decision decoder is employed to decode the error correction code, and metric sums y_i are added to the soft decision

-14-

decoder output, and the sum is fed to an error correction decoder. Error correction coding will be more effective if different outputs of the error correction encoder are interleaved by separating consecutive output bits as far as possible in the transmission stream.

5 It will be appreciated that the higher the number of bit and message repetitions, the better the performance of the system will be, but the longer the delay will be. A TDMA slot has a finite number of bits which may be used as either sync information or data. Increasing the number of bit repeats (N) in a packet necessarily requires a reduction in the number of sync bits. The metric sum depends upon the estimated
10 channel quality, and the channel quality depends upon the number of sync bits. If a TDMA slot has N_t bits, there are N_s sync bits/slot, and $N_t - N_s$ data bits per slot; then the gain in signal-to-noise ratio per bit due to repetition is approximately $(N_t N_s - N_s^2) / N_t$. The optimal gain in signal-to-noise ratio therefore occurs when $N_s = N_t / 2$. However, it will be appreciated that the choice of the number of sync bits and data bits in a given
15 slot will depend upon the particular transmission scheme to be implemented.

As described above, the link established for communicating messages between a satellite and a mobile station is a bidirectional link. Accordingly, a radio protocol may be chosen for use between the satellite and the mobile station to enhance the utility of the short message system. For example, a simple protocol may be implemented in
20 which a mobile station receiving a message would respond to the satellite with a "YES" or "NO" to indicate whether the message was received correctly. Alternatively, a more complicated protocol can be implemented in which a packet or group of packets is identified by a group ID and protected by CRC error detection code. If the CRC indicates that the message was not received correctly, then the satellite can resend
25 the packets comprising the erroneous group. In this manner, only packets with errors need to be retransmitted, as opposed to resending a complete message. Thus, this protocol can be used to optimize the number of repeats and thereby minimize delay and wasted satellite power.

The bidirectional link of the SMS according to the present invention also
30 provides for advantages with respect to billing. A unidirectional link prevents a short message delivery fee to be charged to the sender or recipient because there is no

-15-

evidence that the message was correctly received. Thus, a SMS service with a unidirectional link may be offered to a subscriber at an increased subscription rate. In contrast, because a bidirectional link allows a message sender or service operator to determine whether a message was correctly received, the service operator can provide a
5 SMS service with a delivery fee for each correctly received message only.

As discussed above, for longer messages, voice communications, or conditions requiring a link margin of greater than 30-40 dB, unacceptably long delays may result in the technique of the present invention. In such cases, the message may be stored at the satellite or corresponding cellular mobile switching center (MSC). When the
10 mobile unit is able to read the broadcast control channel (BCCH) of a more favorable communication channel, the unit may be alerted of the stored message by means of, for example, a flag on the broadcast control channel.

Using the technique of the present invention, increased signal margin may be provided without bandwidth expansion, thereby avoiding complicated mobile station
15 design. Further, there is no change required in the TDMA frame structure or organization, other than message content. The method of the present invention allows signals to be transmitted to or from the mobile station. Since the method is bidirectional, it will be appreciated by those of ordinary skill in the art that the system can be implemented as part of a signal control channel in a TDMA system.

20 While the foregoing description has included many specificities, the exemplary embodiments disclosed are for illustrative purposes only, and are not limiting of the present invention. Many modifications will be readily apparent to those of ordinary skill in the art which do not depart from the spirit and scope of the invention, as defined by the appended claims and their legal equivalents.

-16-

WHAT IS CLAIMED IS:

1. A method for increasing the margin of communications link, comprising:
establishing a communication link between a transmitter and a receiver at an
initial margin level, the communication link having a plurality of time slots, each time
slot including a plurality of information bits;
transmitting an information signal in groups of one or more information bits
from the transmitter to the receiver over the communication link a plurality of times,
each transmission of each group occurring within the same time slot and at an
intermediate margin level between the initial margin level and an increased margin
level; and
integrating the transmissions of each group at the receiver to form a signal
having the increased margin level.
2. The method of claim 1, further comprising the step of encoding each
transmission with error detection coding information prior to the step of transmitting.
3. The method of claim 2, further comprising the step of decoding the
information bits by soft combining prior to the step of integrating.
4. The method of claim 1, further comprising the steps of determining whether
the transmission of the information signal is successful, and storing the information
bits of the information signal for later transmission to the receiver if the transmission
of the information signal is unsuccessful.
5. The method of claim 1, wherein the transmitter is a satellite and the receiver
is a mobile telephone unit.
6. The method of claim 1, wherein the transmitter is a mobile telephone unit
and the receiver is a satellite.

-17-

7. The method of claim 6, wherein the information signal is an acknowledgement signal.

8. The method of claim 7, wherein the acknowledgement signal is transmitted
5 on the random access channel of a mobile radiocommunication link.

9. The method of claim 1, wherein the information signal is an alphanumeric message.

10. The method of claim 1, wherein the communication link is a bidirectional
10 link.

11. The method of claim 1, wherein the communication link is a Rayleigh
15 channel.

12. The method of claim 4, further comprising the step of notifying the receiver
that the information signal is being stored.

13. A communication system, comprising:
20 a transmitter for transmitting information signals at a first power level, the
transmitter including means for transmitting portions of one of the information signals
a plurality of times at a second power level;
a receiver for receiving the portions and integrating the received portions to
form an integrated information signal.

25

14. The communication system of claim 13, wherein the transmitter further
includes an encoder for encoding the information signals with error detection coding,
and wherein the receiver includes a decoder for decoding the received portions.

30 15. The communication system of claim 14, wherein each portion includes one
or more bits of an information signal.

-18-

16. The communication system of claim 13, wherein the transmitter is a satellite and the receiver is a mobile telephone unit.

5 17. The communication system of claim 13, wherein the transmitter is a mobile telephone unit and the receiver is a satellite.

18. The communication system of claim 17, wherein the information signals are transmitted on the random access channel of a mobile radiocommunication link.

10 19. The communication system of claim 14, wherein the transmitter and receiver communicate to determine whether the transmission of the information signal is successful, and a storage means stores the information bits of the information signal for later transmission to the receiver if the transmission of the information signal is unsuccessful.

15 20. The communication system of claim 19, wherein the transmitter notifies the receiver that the information bits are being stored by the storage means.

20 21. The communication system of claim 14, wherein the information signal is an alphanumeric message.

22. The communication system of claim 14, wherein the portions transmitted by the transmitter are decorrelated.

25 23. The communication system of claim 14, wherein the transmitter further includes an error correction encoder for encoding the information signals with error correction coding, and the receiver further includes an error correction decoder for decoding the received portions.

-19-

24. A method for transmitting data, comprising the steps of:
encoding data to be transmitted with error detection coding to form a data
codeword;
dividing the data codeword into packets of one or more data bits each;
5 transmitting each packet a plurality of times at a first signal margin over a
communication channel established between a transmitter and a receiver, the
communication channel carrying voice signals at a second signal margin, the second
signal margin being lower than the first signal margin;
sampling the packets at the receiver;
10 decoding the packets; and
integrating the decoded packets to form a data signal having a third signal
margin, the third signal margin being higher than the first signal margin.

25. The method of claim 24, wherein the step of decoding is performed by soft
15 combining.

26. The method of claim 24, wherein the step of decoding is performed by hard
decision decoding.

20 27. The method of claim 24, wherein the data signal is an alphanumeric
message.

28. The method of claim 24, wherein the transmitter is a satellite and the
receiver is a mobile telephone unit.

25 29. The method of claim 24, wherein the transmitter is a mobile telephone unit
and the receiver is a satellite.

30 30. The method of claim 29, wherein the data signal is an acknowledgement
signal for acknowledging the receipt of a message.

-20-

31. The method of claim 30, wherein the acknowledgement signal is transmitted on the random access channel of a mobile radiocommunication system.

32. The method of claim 27, further comprising the steps of:
5 determining at the receiver whether the alphanumeric message contains any errors;

requesting retransmission of one or more packets if the alphanumeric message contains errors; and


10 displaying the alphanumeric message at the receiver if the alphanumeric message does not contain errors.

33. The method of claim 24, wherein the transmissions of each packet are decorrelated.

15 34. The method of claim 24, further comprising the step of encoding the codeword with error correction coding prior to the step of transmitting.


1 / 3

FIG. 1
PRIOR ART

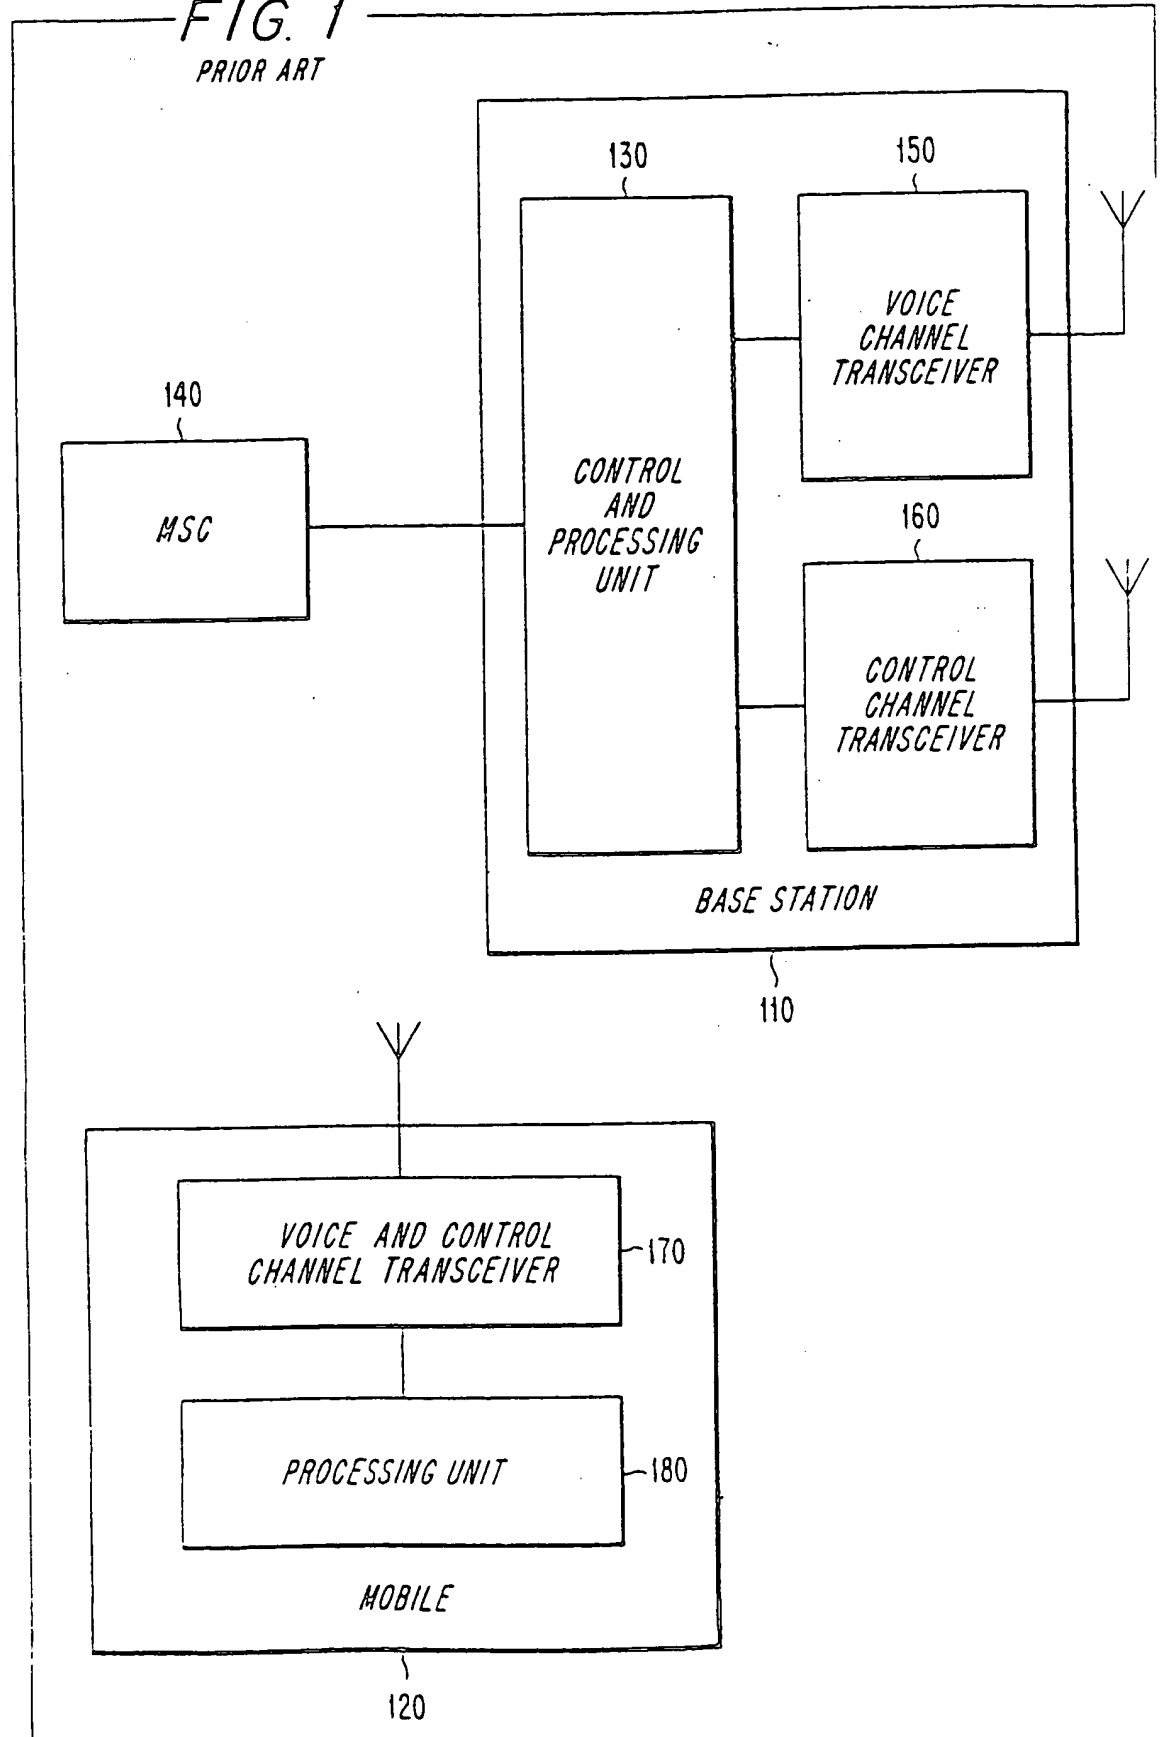

2 / 3

FIG. 2
PRIOR ART

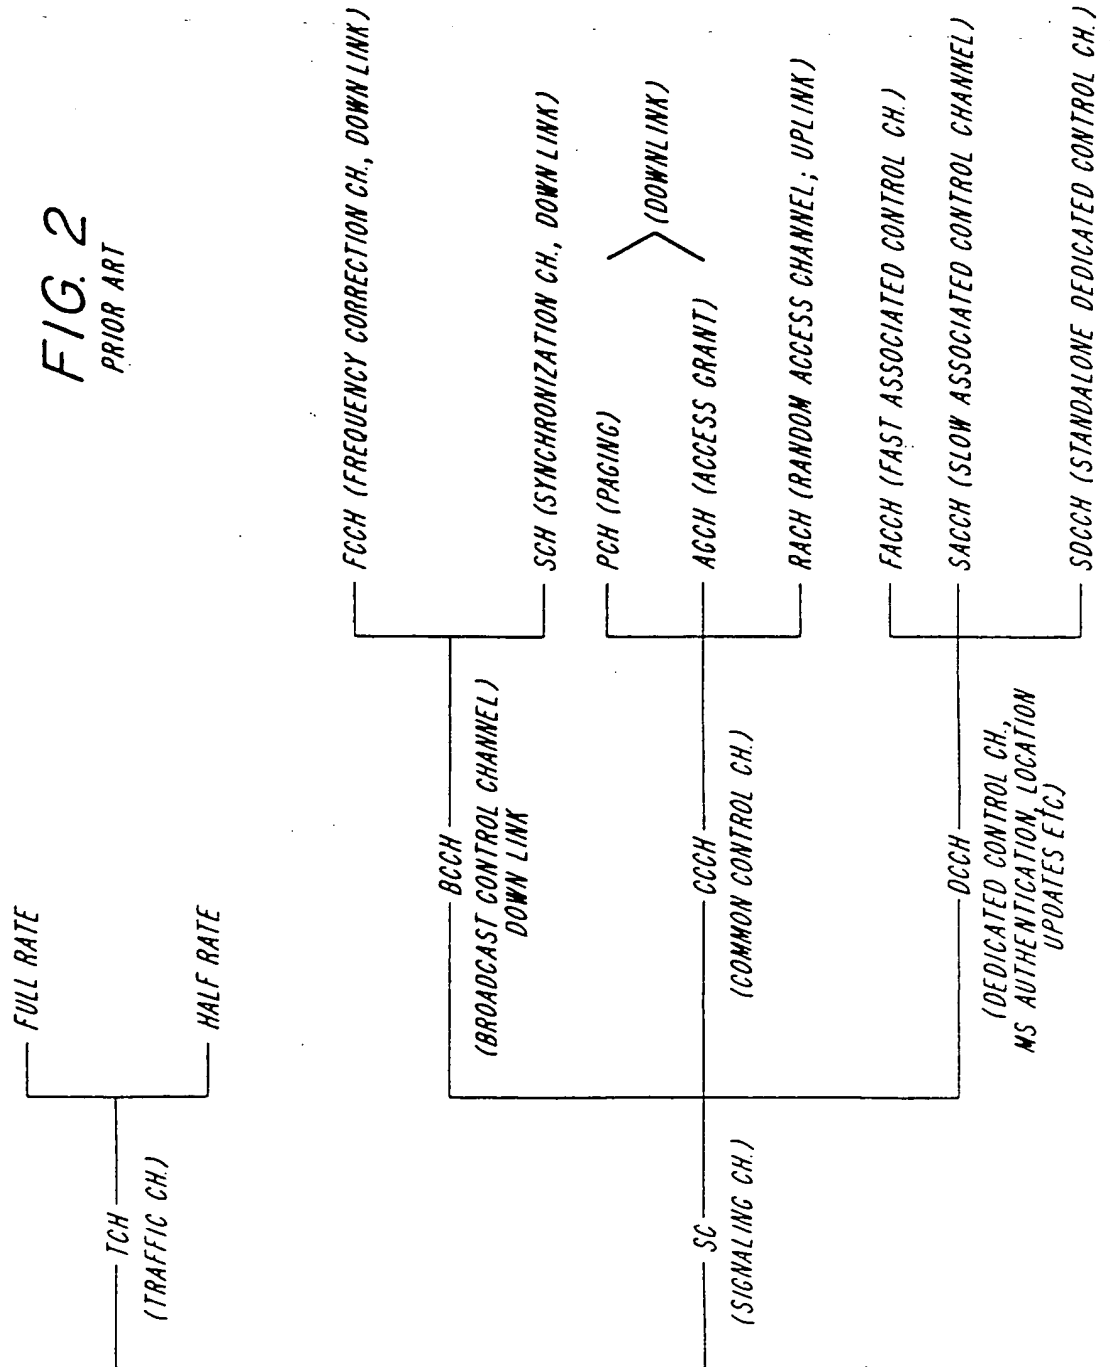

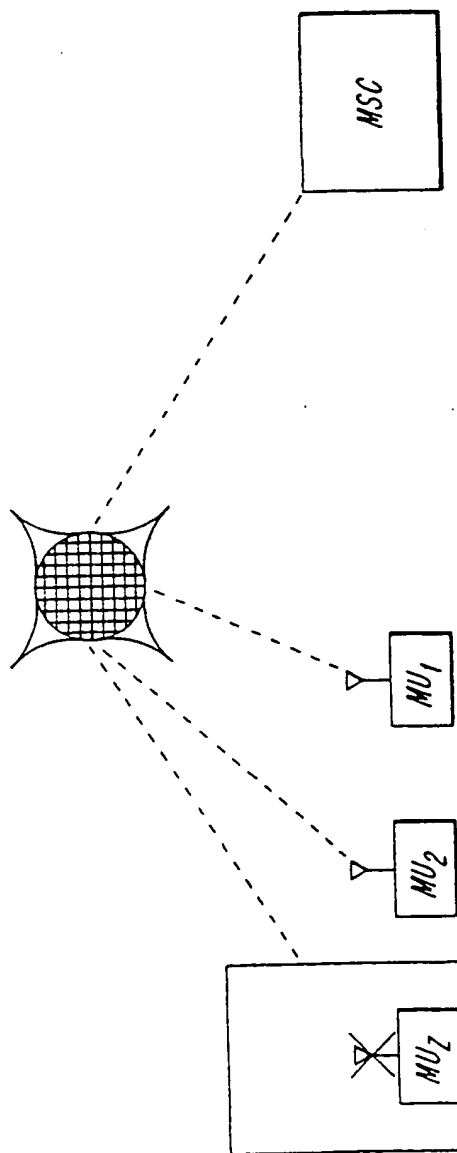


FIG. 3

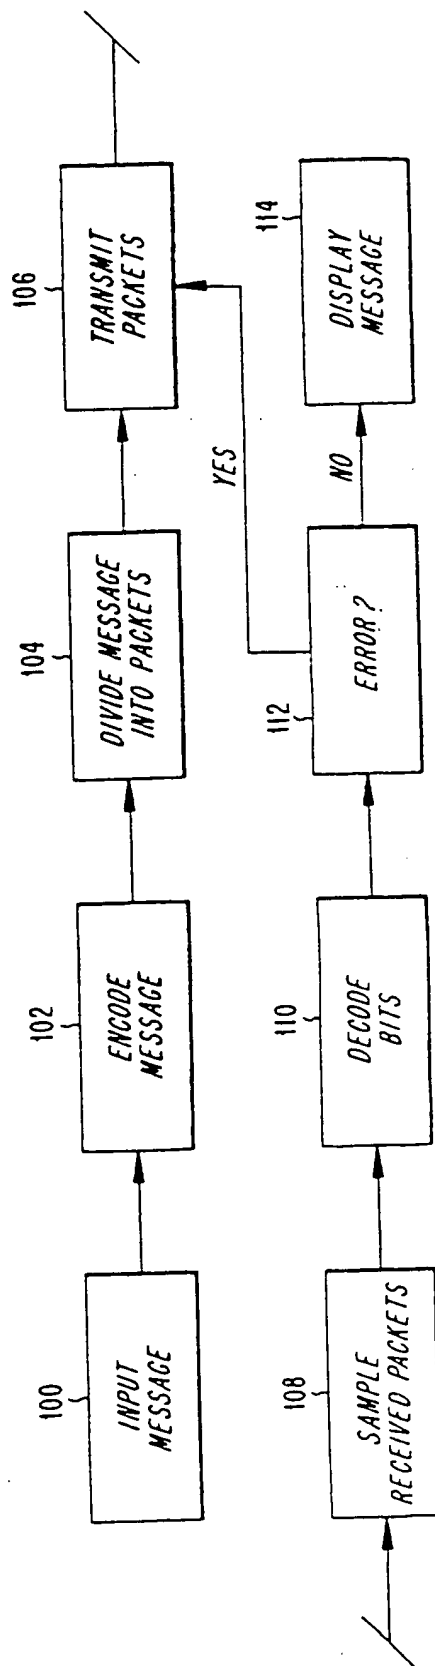


FIG. 4

A. CLASSIFICATION OF SUBJECT MATTER
IPC 6 H04L1/08 H04B7/212

According to International Patent Classification (IPC) or to both national classification and IPC

B. FIELDS SEARCHED

Minimum documentation searched (classification system followed by classification symbols)

IPC 6 H04L H04B

Documentation searched other than minimum documentation to the extent that such documents are included in the fields searched

Electronic data base consulted during the international search (name of data base and, where practical, search terms used)

C. DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
Y	WO,A,81 00034 (WESTERN ELECTRIC COMPANY) 8 January 1981	1,5,6
X	see page 2, line 22 - page 3, line 34 ---	13,16,17
Y	US,A,4 145 573 (ARNOLD) 20 March 1979 see claims 1-11 ---	1,5,6
A	US,A,5 406 593 (S.CHENNAKESHU ET AL.) 11 April 1995 see abstract ---	11
A	US,A,4 882 765 (MAXWELL ET AL.) 21 November 1989 see column 2, line 6 - column 3, line 20 ---	1-12, 14-23
A	DE,A,26 40 756 (STANDARD ELEKTRIK LORENZ) 16 March 1978 see claims 1-8 ---	1-12, 14-23
	-/--	

☒ Further documents are listed in the continuation of box C.

☒ Patent family members are listed in annex.

* Special categories of cited documents:

- * "A" document defining the general state of the art which is not considered to be of particular relevance
- * "E" earlier document but published on or after the international filing date
- * "L" document which may throw doubts on priority claim(s) or which is cited to establish the publication date of another citation or other special reason (as specified)
- * "O" document referring to an oral disclosure, use, exhibition or other means
- * "P" document published prior to the international filing date but later than the priority date claimed

* "T" later document published after the international filing date or priority date and not in conflict with the application but cited to understand the principle or theory underlying the invention

* "X" document of particular relevance; the claimed invention cannot be considered novel or cannot be considered to involve an inventive step when the document is taken alone

* "Y" document of particular relevance; the claimed invention cannot be considered to involve an inventive step when the document is combined with one or more other such documents, such combination being obvious to a person skilled in the art.

* "&" document member of the same patent family

Date of the actual completion of the international search

3 January 1997

Date of mailing of the international search report

- 5. 03. 97

Name and mailing address of the ISA

European Patent Office, P.B. 5818 Patentlaan 1
NL - 2280 HV Rijswijk
Tel. (+ 31-70) 340-2040, Tx. 31 651 epo nl.
Fax (+ 31-70) 340-3016

Authorized officer

Bischof, J-L

INTERNATIONAL SEARCH REPORT

Intern. Application No.

PCT/US 96/17186

II. (Continuation) DOCUMENTS CONSIDERED TO BE RELEVANT

Category	Citation of document, with indication, where appropriate, of the relevant passages	Relevant to claim No.
A	US,A,4 910 792 (TAKAHATA ET AL.) 20 March 1990 see column 2, line 45 - line 68 ---	1-23
A	US,A,4 731 866 (MURATANI ET AL.) 15 March 1988 see column 1, line 54 - column 2, line 5; claims 1-5; figures 1-5 ---	1-23
X	FR,A,2 418 984 (NTT) 28 September 1979 see claims 1-6; figures 1-14 ---	24-34
X	US,A,4 941 144 (MIZUKAMI) 10 July 1990 see column 2, line 9 - line 53 ---	24-34
X	US,A,4 691 314 (BERGINS ET AL.) 1 September 1987 see claims 1-20 -----	24-34

INTERNATIONAL SEARCH REPORT

Intern al Application No

PCT/US 96/17186

Patent document cited in search report	Publication date	Patent family member(s)	Publication date
WO-A-8100034	08-01-81	US-A- 4309764 EP-A- 0030551	05-01-82 24-06-81
US-A-4145573	20-03-79	NONE	
US-A-5406593	11-04-95	NONE	
US-A-4882765	21-11-89	NONE	
DE-A-2640756	16-03-78	CH-A- 619658 US-A- 4133504	15-10-80 09-01-79
US-A-4910792	20-03-90	JP-A- 63046824	27-02-88
US-A-4731866	15-03-88	JP-C- 1719814 JP-B- 4007852 JP-A- 62061431	14-12-92 13-02-92 18-03-87
FR-A-2418984	28-09-79	JP-A- 54116860 JP-C- 1217499 JP-A- 55006911 JP-B- 58036862 JP-A- 55006912 DE-A- 2908031 US-A- 4259741	11-09-79 17-07-84 18-01-80 12-08-83 18-01-80 06-09-79 31-03-81
US-A-4941144	10-07-90	JP-A- 63304745	13-12-88
US-A-4691314	01-09-87	NONE	